
CRANE WEIGHT SCALE

CMK ELECTRO POWER PVT LTD.
(An ISO 9001:2015 Certified Company)



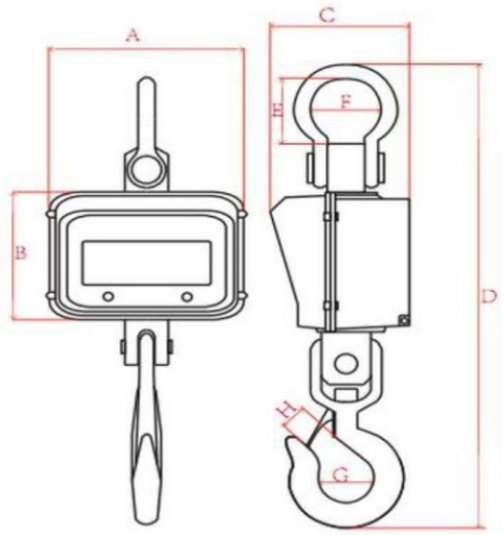

Model	Capacity (in Kg)	e.Value (in Kg)	No. Sub Division	Dimension mm								Net Weight (in Kg)
				A	B	C	D	E	F	G	H	
CMK 2T	2000	1	2000	210	155	220	565	122	68.5	50	43	13.2
CMK 3T	3000	1	3000	210	155	220	565	122	68.5	50	43	13.2
CMK 5T	5000	2	2500	210	155	220	665	139	74	65	55	19
CMK 10T	10000	5	2000	210	155	220	760	171	92	80	65	29
CMK 15T	15000	5	3000	210	155	220	830	187	98.5	80	65	36
CMK 20T	20000	5	4000	300	200	275	1000	235	127	100	85	85
CMK30T	30000	10	3000	300	200	275	1100	258	146	127	117	115
CMK 50T	50000	20	5000	460	317	480	1450	310	233	160	130	340
CMK 100T	100000	50	2000	475	248	375	1660	475	225	175	165	470

Specification:

Class	
Display	5 Digit 30mm (1.2"), 45mm(1.8") RED
Setting Time	5-8s
Control Distance	20m
Battery	6v / 4.2AH or 12V / 7Ah

Certificate	OIML
Tare Range	100% F.F.
Setting Time	5 - 8s
Over load warming	110% F.S.
Safe Overload	125% F.S.
Rechargeable Battery	6V/4.2Ah or 12V/7 Ah
Display	LED (RED)
Work Temperature	-10° C~+F40° C

Features:

NEW :	New design PCB and linger standby time
QUICK :	Integral design of load cell, Quick, accurate, stable weighing
GOOD:	High quality rechargeable battery and impact ressistant MS powder coated Body
STABLE :	Perfect software , never system holted
FACTION :	Patent design
EASE OF USE :	Convenient remote controller

TESTED & CALIBRATED at FULL LOAD